

OSPF Router ID



- OSPF routers identify themselves using an OSPF Router ID which is in the form of an IP address.
- This will default to being the highest IP address of any loopback interfaces configured on the router, or the highest other IP address if a loopback does not exist.
- Loopback interfaces never go down so the Router ID will not change.
- You can also manually specify the Router ID.
- Best practice is to use a Loopback or manually set the Router ID.

OSPF Router ID – No Loopback



```
R1#sh ip int brief
```

Interface	IP-Address	OK?	Method	Status	Protocol
FastEthernet0/0	10.0.0.1	YES	NVRAM	up	up
FastEthernet1/0	10.0.1.1	YES	NVRAM	up	up
FastEthernet2/0	10.0.2.1	YES	NVRAM	up	up
FastEthernet3/0	10.0.3.1	YES	NVRAM	up	up



```
R1#show ip protocols
```

```
*** IP Routing is NSF aware ***
```

```
Routing Protocol is "ospf 1"
```

```
Outgoing update filter list for all interfaces is not set
```

```
Incoming update filter list for all interfaces is not set
```

```
Router ID 10.0.3.1
```

```
Number of areas in this router is 1. 1 normal 0 stub 0 nssa
```

```
Maximum path: 4
```

```
Routing for Networks:
```

```
10.0.0.0 0.0.255.255 area 0
```

```
Routing Information Sources:
```

```
Gateway Distance Last Update
```

```
10.1.1.2 110 00:24:12
```

```
10.1.0.2 110 00:17:30
```

```
10.1.3.2 110 00:24:01
```

```
203.0.113.1 110 00:23:22
```

```
Distance: (default is 110)
```

OSPF Router ID - Loopback



```
R1#sh ip int brief
```

Interface	IP-Address	OK?	Method	Status	Protocol
FastEthernet0/0	10.0.0.1	YES	NVRAM	up	up
FastEthernet1/0	10.0.1.1	YES	NVRAM	up	up
FastEthernet2/0	10.0.2.1	YES	NVRAM	up	up
FastEthernet3/0	10.0.3.1	YES	NVRAM	up	up
Loopback0	1.1.1.1	YES	manual	up	up



```
R1#sh ip protocols
```

```
*** IP Routing is NSF aware ***
```

```
Routing Protocol is "ospf 1"
```

```
Outgoing update filter list for all interfaces is not set
```

```
Incoming update filter list for all interfaces is not set
```

```
Router ID 1.1.1.1
```

```
Number of areas in this router is 1. 1 normal 0 stub 0 nssa
```

```
Maximum path: 4
```

```
Routing for Networks:
```

```
10.0.0.0 0.0.255.255 area 0
```

```
Routing Information Sources:
```

```
Gateway Distance Last Update
```

```
10.1.1.2 110 00:31:38
```

```
10.1.0.2 110 00:03:46
```

```
10.1.3.2 110 00:31:27
```

```
Distance: (default is 110)
```

- If a loopback or higher IP address is configured, the Router ID will change on OSPF process restart.

OSPF Router ID – Manually Configured



```
R1(config-router)#router ospf 1
```

```
R1(config-router)#router-id 2.2.2.2
```

```
% OSPF: Reload or use "clear ip ospf process" command, for this to take effect
```

```
R1#clear ip ospf process
```

```
R1#show ip protocols
```

```
*** IP Routing is NSF aware ***
```

```
Routing Protocol is "ospf 1"
```

```
Outgoing update filter list for all interfaces is not set
```


```
Incoming update filter list for all interfaces is not set
```

```
Router ID 2.2.2.2
```

```
Number of areas in this router is 1. 1 normal 0 stub 0 nssa
```


```
! truncated
```

Passive Interface Configuration

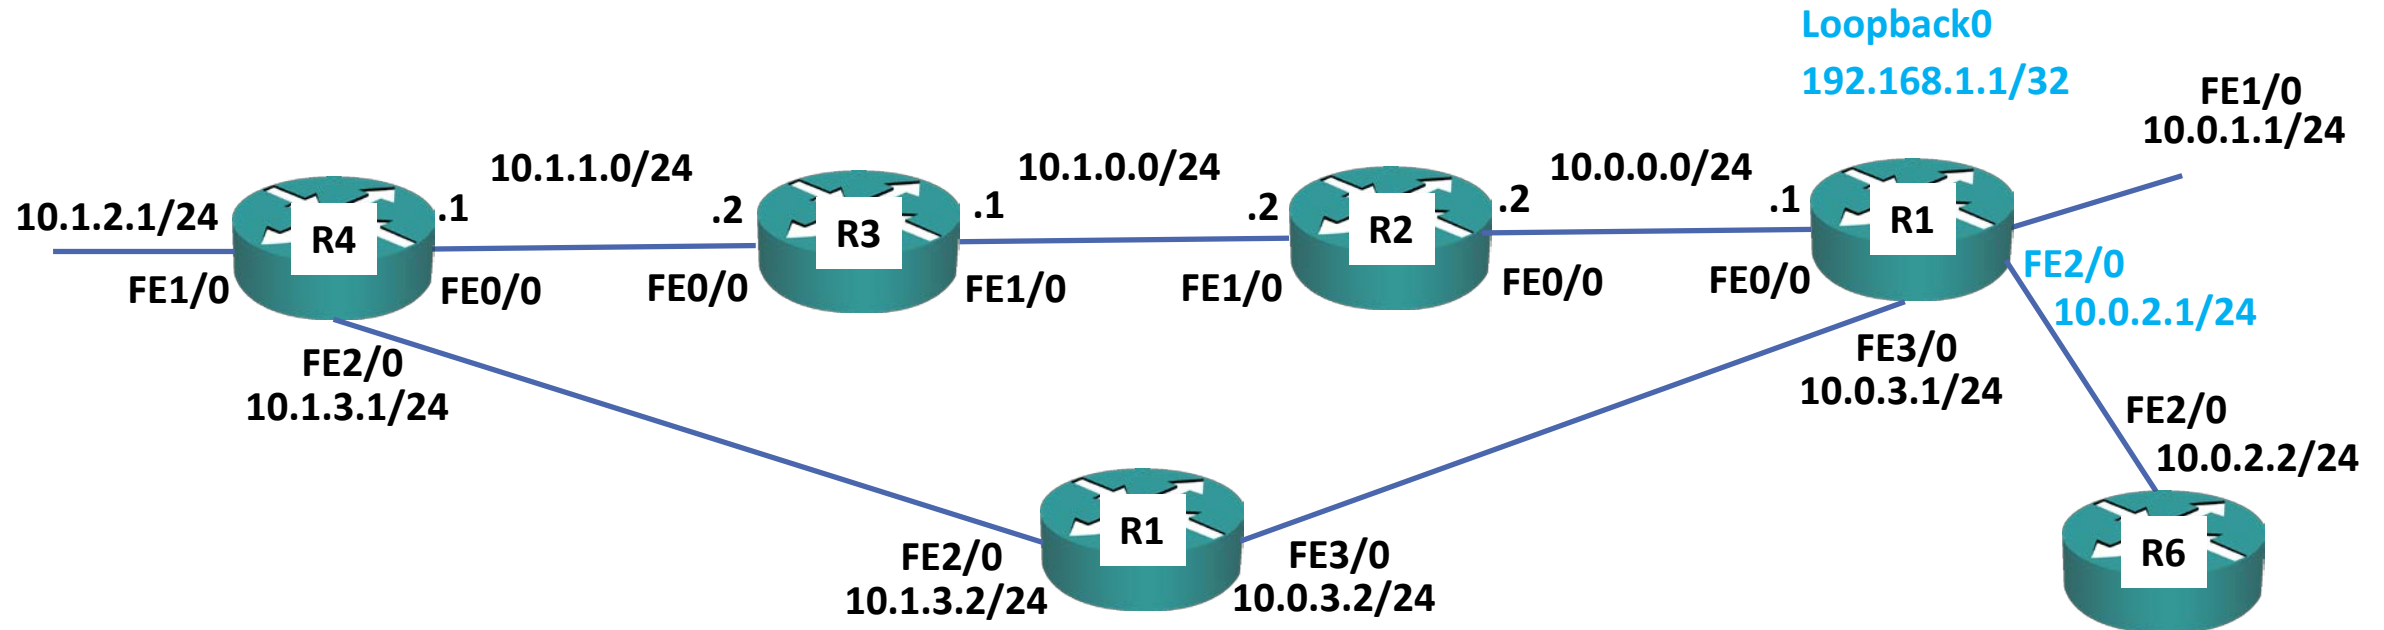


```
R1(config)#router ospf 1
R1(config-router)#passive-interface loopback 0
R1(config-router)#passive-interface f2/0
```

Passive Interface Configuration

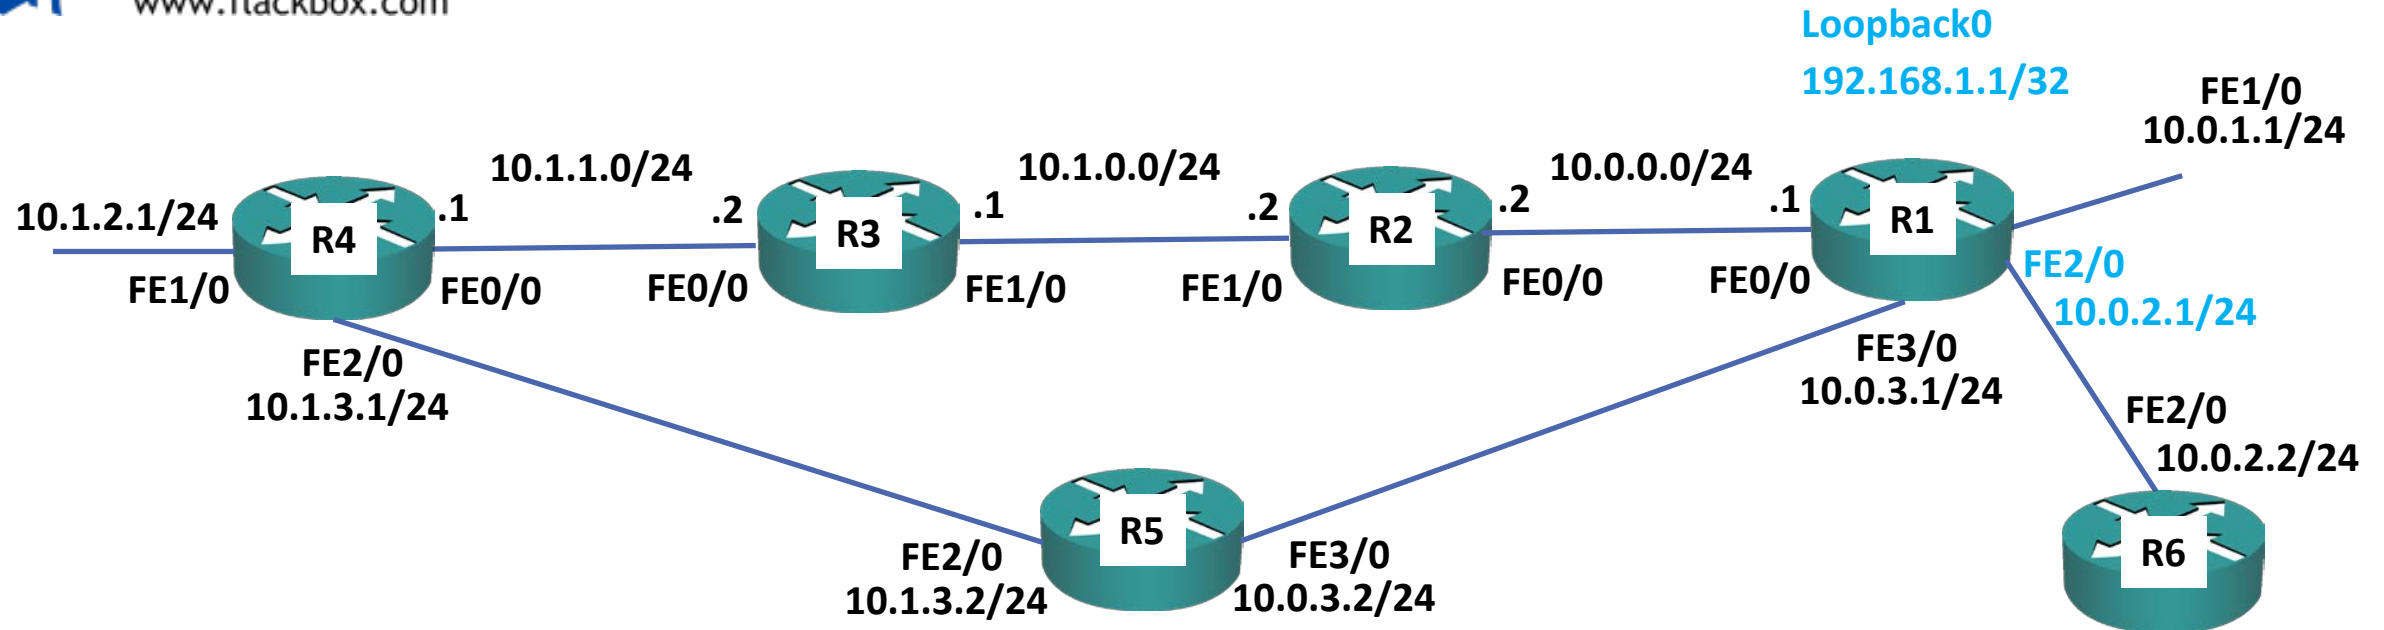

```
R1(config)#router ospf 1
R1(config-router)#passive-interface default
R1(config-router)#no passive-interface f0/0
R1(config-router)#no passive-interface f1/0
R1(config-router)#no passive-interface f3/0
```

Default Route Injection

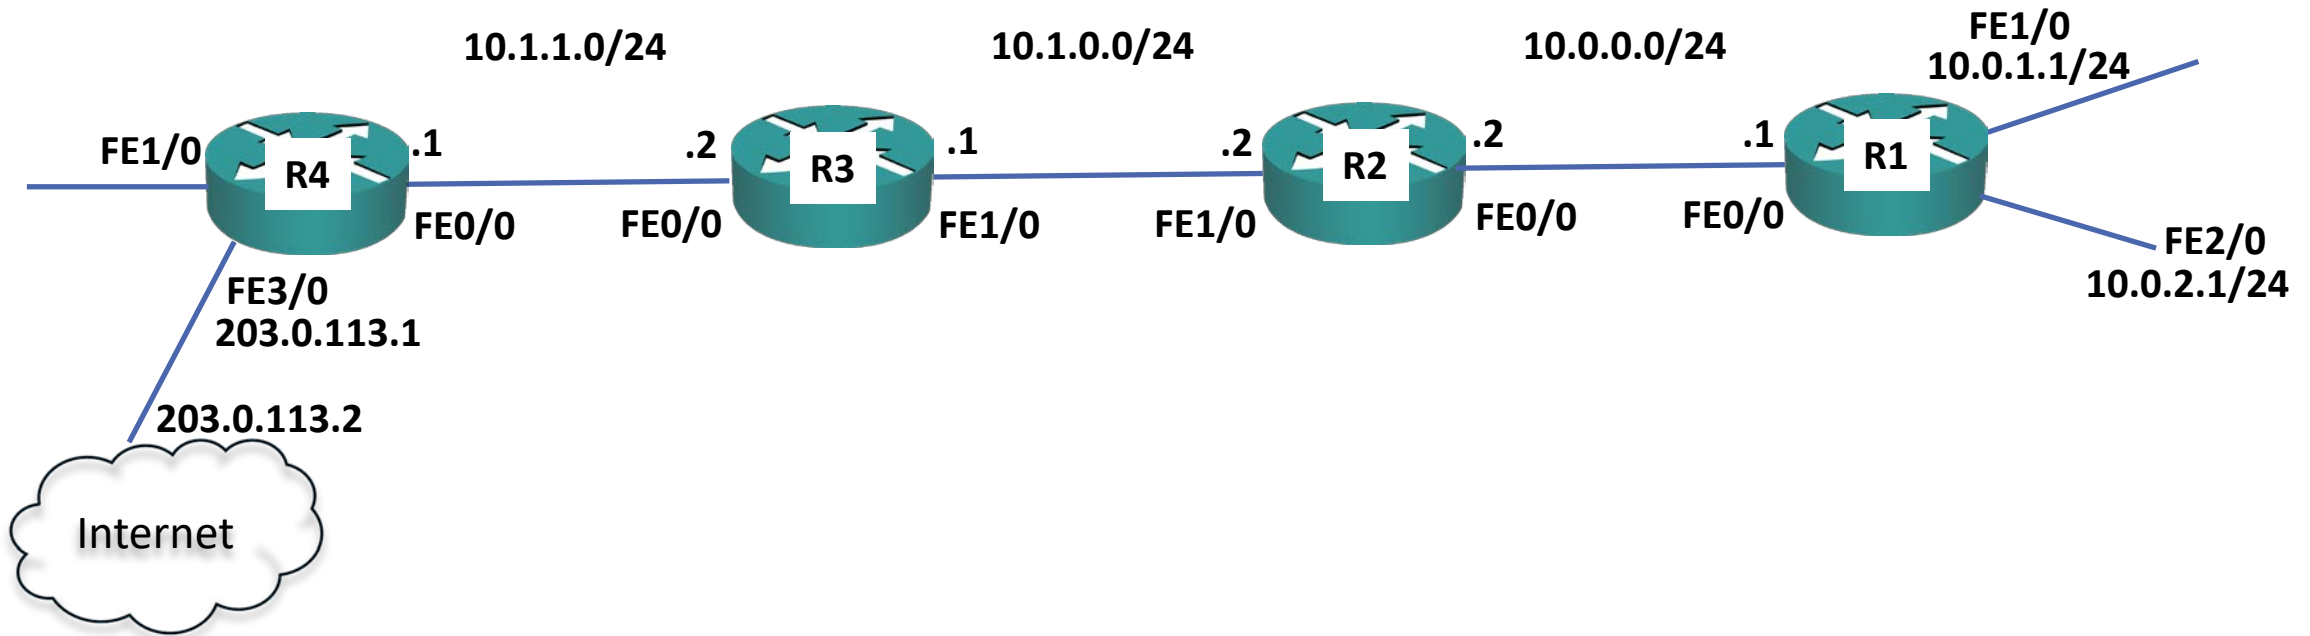

```
R4(config)#ip route 0.0.0.0 0.0.0.0 203.0.113.2
R4(config)#router ospf 1
R4(config-router)#default-information originate
```

Default Route Injection Verification



```
R1#sh ip route
```

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
+ - replicated route, % - next hop override
```

```
Gateway of last resort is 10.0.0.2 to network 0.0.0.0
```

```
O*E2 0.0.0.0/0 [110/1] via 10.0.0.2, 00:00:01, FastEthernet0/0
1.0.0.0/32 is subnetted, 1 subnets
C      1.1.1.1 is directly connected, Loopback0
10.0.0.0/8 is variably subnetted, 12 subnets, 2 masks
C      10.0.0.0/24 is directly connected, FastEthernet0/0
L      10.0.0.1/32 is directly connected, FastEthernet0/0
C      10.0.1.0/24 is directly connected, FastEthernet1/0
L      10.0.1.1/32 is directly connected, FastEthernet1/0
C      10.0.2.0/24 is directly connected, FastEthernet2/0
L      10.0.2.1/32 is directly connected, FastEthernet2/0
C      10.0.3.0/24 is directly connected, FastEthernet3/0
L      10.0.3.1/32 is directly connected, FastEthernet3/0
O      10.1.0.0/24 [110/51] via 10.0.0.2, 01:40:53, FastEthernet0/0
O      10.1.1.0/24 [110/52] via 10.0.0.2, 00:00:11, FastEthernet0/0
O      10.1.2.0/24 [110/53] via 10.0.0.2, 00:00:01, FastEthernet0/0
O      10.1.3.0/24 [110/2] via 10.0.3.2, 00:00:40, FastEthernet3/0
```


Lab

